
## Sauder Education

# **Color Card**

MOMENTUM



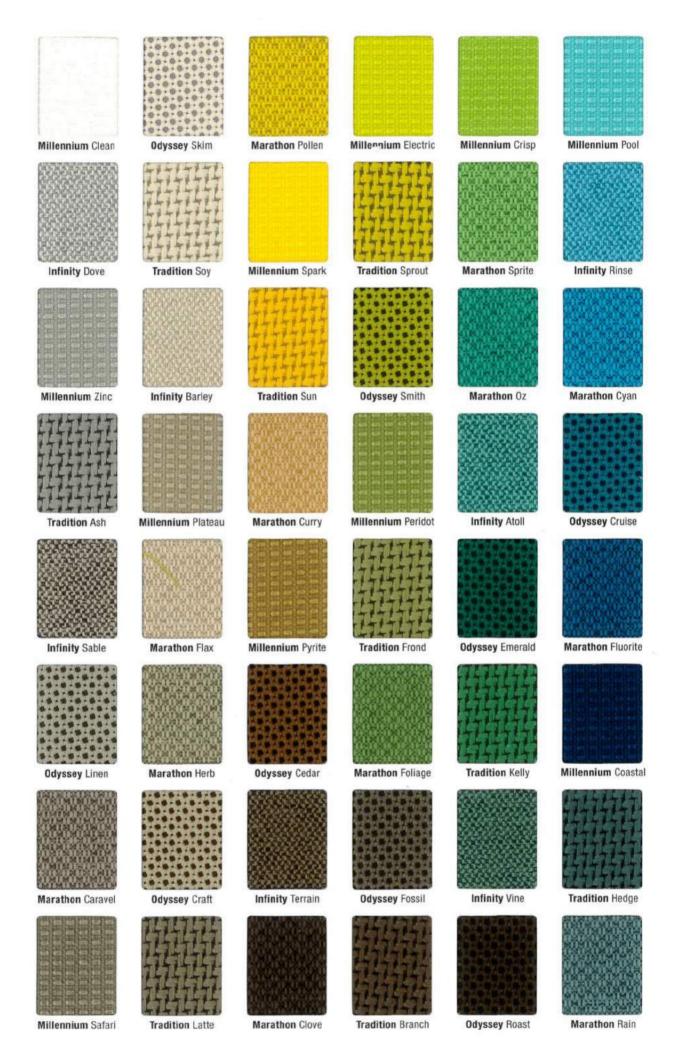

### Color Card

Width- Pattern	Fiber Content & Backing	Finish	Abrasion (D.R.)	Light- fastness	Approx. Repeats	Cleaning Code
57" INFINITY #囚業 ♥ ☆*	74% Post Consumer Recycled Polyester, 26% Polyester Acrylic Backing	Soil & Stain Resistant	200,000	(Cl. 4) 40 Hrs.	1/8" L, 5/8" W	WS
57" MARATHON	75% Post Consumer Recycled Polyester, 25% Polyester Acrylic Backing	Soil & Stain Resistant	200,000	(Cl. 4) 40 Hrs.	1/8" L, 1/8" W	WS
56" MILLENNIUM	85% Post Consumer Recycled Polyester, 15% Polyester Acrylic Backing	Soil & Stain Resistant	200,000	(Cl. 4) 40 Hrs.	1/8" L, 1/8" W	WS
#□ * # ★*	67% Post Consumer Recycled Polyester, 33% Polyester Acrylic Backing	Soil & Stain Resistant	200,000	(Cl. 4) 40 Hrs.	1/8" L, 1/8" W	ws
56" TRADITION ●囚業●大*	72% Post Consumer Recycled Polyester, 28% Polyester Acrylic Backing	Soil & Stain Resistant	200,000	(CI. 4) 40 Hrs.	1/8" L, 1/8" ₩	WS

All Patterns meet CA Bulletin 117-E. Primary Application: Upholstery Seating. \*ACT® Registered Certification Marks

#### EXPLANATION OF ACT ICONS FOR UPHOLSTERY

#### FIRE RETARDANCY

Flammability testing determined as fabric's resistance to burning.



PASSES California 117

California 117

#### COLORFASTNESS TO WET & DRY CROCKING

Colorfastness to wet & dry crocking refers to the rubbing off of color from the fabric onto clothing, hands or other materials and can occur under wet or dry conditions.



**PASSES** 

AATCC 8-1974 Dry Crocking, Class 4 minimum;

Wet Crocking,

Class 3 minimum

#### COLORFASTNESS TO LIGHT

Colorfastness to light is the degree to which fabric will retain its color when exposed to light.



#### PASSES

AATCC 16A-1974 or AATCC 16E-1976; Class 4 minimum at 40 hours

NOTE: Class 4 minimum at 60 hours is recommended for direct sunlight exposure situations

#### PHYSICAL PROPERTIES

3 physical property tests include: brush pill test to determine a fabric's pilling. Breaking/tensile strength is the ability of a fabric to withstand tension without breaking or tearing. Seam slippage is the pulling apart of fabrics at the seams.



#### PASSES

Brush Pill ASTM D3511, 3-4 minimum Breaking Strength ASTM D3597-D1682-64 (1975) 50 lbs. minimum in warp & weft Seam Slippage ASTM D3597-D434-75 25 lbs. minimum in warp & weft



#### ABRASION

Abrasion is the ability of a fabric to withstand damage from wear and rubbing. There is a general contract specification as well as a heavy duty specification.

PASSES

General Contract ASTM 3597 modified (#10 cotton duck);

15,000 double rubs Wyzenbeek Method

Heavy Duty ASTM 3597 modified (#10 cotton duck); 30,000 double rubs Wyzenbeek Method or

ASTM D4966 (with 21 oz. weight); 40,000 rubs Martindale Method

#### CLEANING CODE DEFINITIONS

WS: Clean with water-based cleaning agents or foam. (Energine, Carbona, Renuzit or other similar products). Vacuuming or light brushing is recommended to prevent dust and soil buildup.

5clicks

In 5 simple clicks, you can find hundreds of pre-approved, in grade, and in stock fabrics.

GREENGUARD Children & Schools Indoor Air Quality Certified®. CA Section 01350 compliant. Eligible for CHPS Low-Emitting Material Credits.

SAUDER | Education 930 W. Barre Road Archbold, OH 43502 800.537.1530 ph 419.446.4945 fax sales@saudereducation.com www.saudereducation.com Additional patterns and colors are available in Momentum Textiles Library Books or visit us at memosamples.com

Memo samples are available on request: call, fax, or visit our Web site.

MOMENTUM TEXTILES

> 800-366-6839 memosamples.com